



大境
DAJING

风机产品样本

FAN PRODUCT SAMPLE

河南大境风机科技有限公司

地址：河南省新乡市小冀香港路北段
电话：0373-4693888
网址：www.hndjfj.com
邮箱：djfj168@163.com



HENAN DAJING FAN TECHNOLOGY CO.,LTD.


Add: Section Of Hong Kong Road,Xiaoji Town,
Xinxiang County,HeNan Province,China.
Phone: +86-0373-4693888
Web: www.hndjfj.com
E-mail: djfj168@163.com



创新
Innovation



品质
Quality



诚信
Promise

河南大境风机科技有限公司
HENAN DAJING FAN TECHNOLOGY CO.,LTD.

企业简介

BRIEF INTRODUCTION

河南大境风机科技有限公司，地处中原腹地城市、豫北明珠——新乡。

大道三千，择一而从；专注专一，无边大境！公司自创建之初，就定位于以客户的满意度为唯一的质量标准。严格执行各项标准，专注于通风领域，致力于科技创造出好环境的理念！配备了高速光纤激光切割设备、数控加工设备、数控旋压设备、数控液压设备、高精度动平衡设备、全自动现场振动平衡仪、综合测试仪等风机制造专用设备，并引进国际先进的6S管理，确保到每个零部件都精益求精。公司不断与中国通用机械工业部往来交流，积蓄雄厚的技术力量，学习吸收国内外先进同行业的制造技术，运用先进的CAD辅助设计，自行研发设计了多种低噪声、高耐磨的新产品。对于科技和质量的追求终乎无终，穷乎无穷。

公司产品广泛应用于电厂、锅炉、窑炉、矿山、冶金、石油、化工、化肥、水泥、造纸、烘干、养殖、环保除尘等领域。具有防腐、防爆、低噪音、耐高温、高耐磨等特性。除标准机型外，还可根据用户现场需求提供各类非标型号的设计制作。产品畅销国内外，屡获用户好评。

我们坚持低碳、环保、节能理念，致力于改善行业工作环境、生活空气质量，并不断的学习完善自我，以全新的理念和运营战略，面向全国、走向世界，与所有新老客户实现共赢，以优质精良的产品服务社会，造福人类！

Henan Dajing Fan Technology Co., Ltd. is located in the hinterland city of the Central Plains and Pearl in the north of Henan Province- Xinxiang.

Three thousand boulevards, choose one and follow from one; focus on one, great future! Since its inception, our company has been positioned to be the only quality standard based on customer satisfaction. Strictly implement various standards, focus on the field of ventilation, and committed to creating a good environment! Equipped with high-speed fiber laser cutting machine, CNC spinning machine, high-precision dynamic balancing machine, automatic on-site vibration balancer, comprehensive tester and other special equipment for fan manufacturing, and the introduction of international advanced 6 s management to ensure that every part of the excellence. The company continuously exchanges with the Chinese general machinery industry department, accumulate rich technical experience, studies and absorbs the domestic and foreign advanced manufacture technology of the same industry, uses the advanced CAD assistant design, develops and designs many kinds of low noise by oneself, new products with high wear resistance. The pursuit of science and technology and quality is endless.

Our products are widely used in power plant, boiler, kiln, mine, metallurgy, petroleum, chemical industry, chemical fertilizer, cement, paper making, drying, breeding, environmental protection ,dust removal and so on.With anti-corrosion, explosion-proof, low noise, high temperature resistance, high wear resistant and other characteristics. In addition to standard models, we can also provide all kinds of non-standard models according to the needs of customers. The products are well-selling at home and abroad, and have been repeatedly praised.

We adhere to low-carbon, environmental protection, energy saving concept, committed to improve the industry working environment, living air quality, and constantly learn to improve ourselves, with a new concept and operation strategy, facing the whole country, to the world, With all new and old customers to achieve win-win, serve the society with high quality and excellent products!

目录

CONTENS

一、一般离心通风机

1 / 4-68型离心通风机.....	2
2 / 4-72系列离心通风机.....	4
3 / 4-79型离心通风机.....	6
4 / 4-2×79型离心通风机.....	7
5 / 9-19、9-26系列高压离心通风机.....	8
6 / 洗车风机.....	9
7 / 9-12型高压离心通风机.....	9
8 / XQ型高压离心通风机.....	9

二、电站、锅炉用通引风机

9 / GY4-73型离心通引风机.....	10
10 / GY4-68型离心通引风机.....	12
11 / GGGY-15系列离心引风机.....	13
12 / GY6-41型离心通引风机.....	13
13 / GY7-41型离心通引风机.....	14
14 / Y6-30型离心引风机.....	14
15 / Y5-47型离心引风机.....	15
16 / Y5-48型离心引风机.....	15
17 / GY5-51型离心送引风机.....	16
18 / GY6-51型离心送引风机.....	18
19 / Y8-39型离心引风机.....	20
20 / Y9-38型离心引风机.....	20

三、排尘物料风机

21 / MQS5-54型物料输送风机.....	21
--------------------------	----

四、轴流通风机

22 / SF系列轴流通风机.....	21
23 / T35型轴流通风机.....	22
24 / GD30K2型轴流通风机.....	22

五、其它

25 / LNZ- I 型砖瓦窑专用轴流风机.....	23
26 / LNZ- II 型砖瓦窑专用轴流风机.....	23
27 / 部分工程案例.....	24
28 / 风机旋向角度、传动方式图例.....	27

I General centrifugal fan

1/ 4-68 centrifugal fan.....	2
2/ 4-72 series centrifugal fan.....	4
3/ 4-79 centrifugal fan.....	6
4/ 4-2×79 centrifugal fan.....	7
5/ 9-19, 9-26 series high pressure centrifugal fan.....	8
6/ Car Washing fan.....	9
7/ 9-12 high pressure centrifugal fan.....	9
8/ XQ high pressure centrifugal fan.....	9

II Power supply and boiler ventilation fan

9/ GY4-73 centrifugal ventilation fan.....	10
10/ GY4-68 centrifugal ventilation fan.....	12
11/ GGGY-15 series centrifugal induced draft fan.....	13
12/ GY6-41 centrifugal ventilation fan.....	13
13/ GY7-41 centrifugal ventilation fan.....	14
14/ Y6-30 centrifugal ventilation fan.....	14
15/ Y5-47 centrifugal ventilation fan.....	15
16/ Y5-48 centrifugal ventilation fan.....	15
17/ GY5-51 centrifugal blower.....	16
18/ GY6-51 centrifugal blower.....	18
19/ Y8-39 centrifugal induced draft fan.....	20
20/ Y9-38 centrifugal induced draft fan.....	20

III Dust removal material fan

21/ MQS5-54 material conveying fan.....	21
---	----

IV Axial flow fan

22/ SF series axial flow fan.....	21
23/ T35 type axial flow fan.....	22
24/ GD30K2 axial flow fan.....	22

V Other

25/ LNZ-1 brick kiln special axial fan.....	23
26/ LNZ-2 brick kiln special axial fan.....	23
27/ Partial engineering case.....	24
28/ Fan rotation angle, transmission mode legend.....	27

环保 专业 开拓 创新

大境风机
DAJING FAN

钢厂、电厂、水泥厂配套风机





环保 专业 开拓 创新

除尘、烘干系列

大境风机
DAJING FAN

除尘风机主要用于厂矿企业、体育馆、歌剧院、地下室、大小宾馆、酒楼、商场及大型建筑的室内通风换气，降温除尘等用途，亦可与其它各类机械设备配套作气体循环使用。

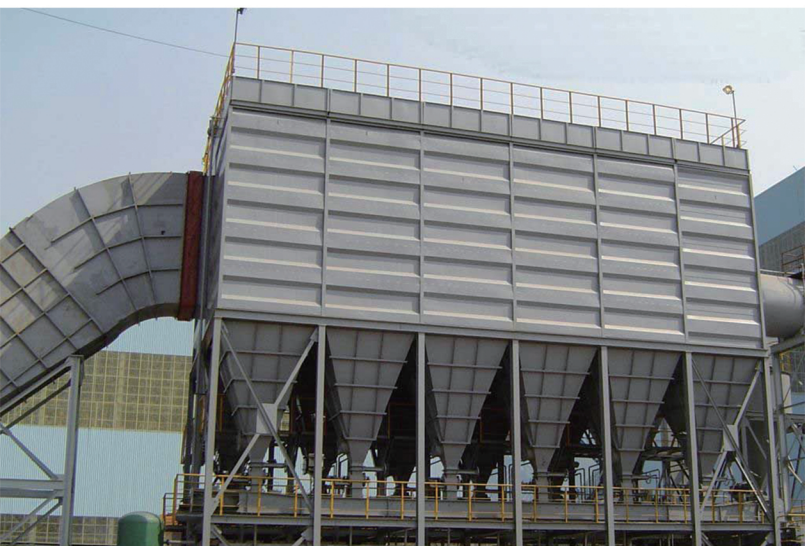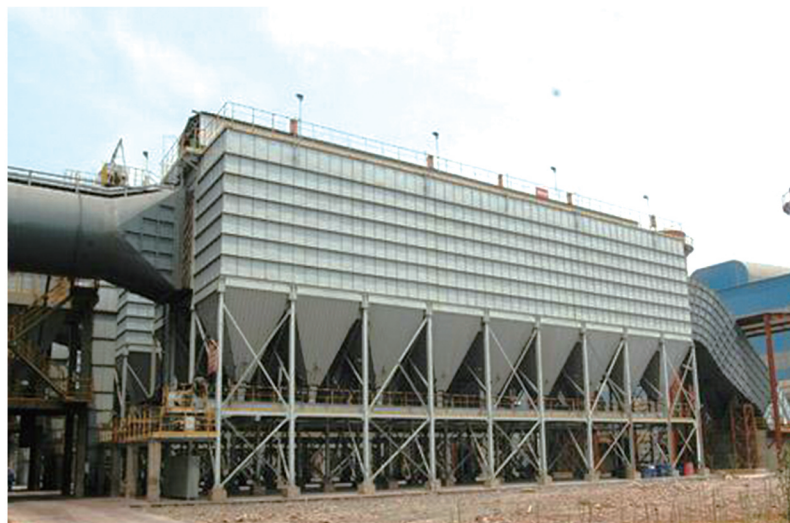

4-68型离心通风机

4-68型离心通风机，一般用于工厂及大型建筑的通风换气，可输送空气或其它不自燃、不易爆、不挥发，对人体无害、对钢材无腐蚀性之气体，且气体内不得有粘性物质，所含尘土及硬质颗粒物不大于 $150\text{mg}/\text{m}^3$ ，气体温度不得超 80°C 。

4-68 Centrifugal Fan

4-68 type centrifugal fan, it is generally used for ventilation and ventilation of factories and large buildings. It can transport air or other gases that are not self-igniting, non-explosive, non-volatile, harmless to the human body, non-corrosive to steel, and there must be no sticky substances in the gas. Dust and hard particles are not more than $150\text{mg}/\text{m}^3$, and the gas temperature should not exceed 80°C .



序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m^3/h	功率 Power kW
1	2.8A	2900	970~657	1131~2262	1.1
		1450	245~166	565~1131	0.55
2	3.15A	2900	1245~853	1825~3435	1.5
		1450	313~215	912~1718	0.55
3	3.55A	2900	1608~1108	2708~5013	3
		1450	402~274	1354~2507	0.55
4	4A	2900	2069~1431	3984~7281	4
		1450	519~353	1992~3641	0.75
5	4.5A	2900	2657~1833	5790~10485	7.5
		1450	666~460	2895~5242	1.1
6	5A	2900	3314~2304	8050~14490	15
		1450	823~578	4025~7245	2.2
7	6.3D	1450	1323~921	8320~14761	5.5
		960	578~402	5508~9773	2.2
8	8D	1450	2157~1500	17585~30774	18.5
		960	941~657	11643~20375	5.5
		730	549~382	8853~15403	3
9	10D	1450	3442~2422	35420~61179	55
		960	1510~1059	23450~40505	18.5
		730	872~617	17832~30801	7.5
10	12.5D	960	2353~1657	45800~79111	55
		730	1363~961	34828~60157	22
11	6.3C	2240	3159~2196	12852~22803	22
		2000	2510~1755	11476~20359	15
		1800	2040~1422	10328~18324	11
		1600	1608~1117	9180~16287	7.5
		1400	1235~863	8032~14251	5.5
		1250	980~686	7172~12724	4
		1120	784~549	6426~11401	3
		1000	627~441	5737~10179	2.2
		900	509~353	5164~9162	1.5
		800	402~284	4590~8144	1.1
12	8C	1800	3314~2314	21830~38202	37
		1600	2618~1833	19404~33958	30
		1400	2009~1401	16979~29713	18.5
		1250	1597~1117	15159~26528	15
		1120	1284~892	13583~23770	11
		1000	1019~715	12128~21224	7.5
		900	833~578	10915~19101	5.5
		800	657~460	9702~16979	4
		710	519~362	8611~15069	3
		630	402~284	7641~13371	2.2

4-68 续表
4-68 Continued Form




序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m³/h	功率 Power kW
13	10C	1250	2558~1793	30534~52740	37
		1120	2048~1441	27358~47256	30
		1000	1637~1147	24427~42192	22
		900	1323~931	21984~37974	15
		800	1049~735	19541~33754	11
		710	823~578	17343~29956	7.5
		630	647~460	15389~26581	5.5
		560	509~362	13679~23627	4
		500	411~284	12214~21096	3
14	12.5C	1120	3206~2255	53434~92296	75、90
		1000	2559~1794	47710~82407	55、75
		900	2069~1451	42938~74166	45
		800	1637~1147	38168~65926	30
		710	1284~902	33874~58509	22
		630	1010~706	30057~51917	15
		560	804~558	26717~46148	11
		500	637~451	23855~41204	7.5
		450	519~362	21469~37083	5.5
		400	411~284	19084~32963	4
15	16B	960	3863~2716	96052~165908	200
		800	2687~1882	80043~138257	90、110
		710	2118~1480	71038~122703	75
		630	1667~1167	63034~108877	55
		560	1314~921	56030~96780	37
		500	1049~735	50027~86410	30
		450	853~598	45024~77769	18.5
		400	666~470	40022~69128	15
		355	529~372	35519~61351	11
		315	411~294	31517~54439	7.5
16	20B	710	3304~2324	138747~239654	220
		630	2598~1824	123113~212650	160
		560	2059~1441	109434~189023	110
		500	1637~1147	97709~168770	75
		450	1323~931	87938~151893	55
		400	1049~735	78167~135016	45
		355	823~578	69373~119827	30
		315	647~460	61557~106325	22
		280	509~362	54717~94511	15
		250	411~284	48855~84385	11

4-72系列离心通风机

4-72系列离心通风机,具有高效率、噪声低、性能曲线平稳等特点,主要用于厂矿企业、体育馆、歌剧院、地下室、大小宾馆、酒楼、商场及大型建筑的室内通风换气,降温除尘等用途,亦可与其它各类机械设备配套作气体循环使用。输送介质为空气和其它不自燃、对人体无害、无腐蚀性气体;B4-72采用防爆电机,可作为易燃、易挥发性气体的通风换气用,气体温度不大于80℃,不允许有粘性物质,尘土及固体杂质不大于150mg/m³。

4-72 Centrifugal Fan

The 4-72 series centrifugal fan features high efficiency, low noise and stable performance curve. Mainly used for indoor ventilation of factories and mines, stadiums, opera houses, basements, large and small hotels, restaurants, shopping malls and large buildings. Cooling, dust removal, etc. It can also be used as a gas recycling system with other types of machinery. The conveying medium is air and other gases that are not self-igniting, harmless to the human body, and non-corrosive. Explosion-proof motor for explosion-proof places. The gas temperature is not more than 80℃, no viscous substances are allowed, and the dust and solid impurities are not more than 150 mg/m³.

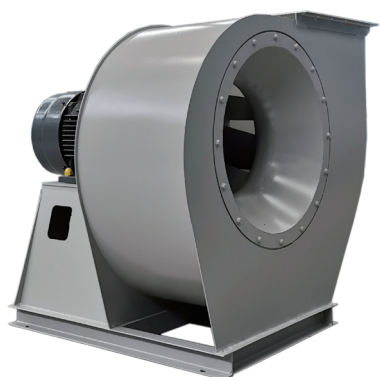

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m ³ /h	功率 Power kW
1	2.8A	2900	994~606	1131~2356	1.5
2	3.2A	2900	1300~792	1688~3517	2.2
		1450	324~198	844~1758	1.1
3	3.6A	2900	1578~989	2664~5268	3
		1450	393~247	1332~2634	1.1
4	4A	2900	2014~1320	4012~7419	5.5
		1450	501~329	2006~3709	1.1
5	4.5A	2900	2554~1673	5712~10562	7.5
		1450	634~416	2856~5281	1.1
6	5A	2900	3187~2019	7728~15455	15
		1450	790~502	3864~7728	2.2
7	6A	1450	1139~724	6677~13353	4
		960	498~317	4420~8841	1.5
8	6D	1450	1139~724	6677~13353	4
		960	498~317	4420~8841	1.5
9	8D	1450	2032~1490	15826~29344	18.5
		960	887~651	10478~19428	5.5
		730	512~376	7968~14773	3
10	10D	1450	3202~2532	40441~56605	55
		960	1395~1104	26775~37476	18.5
		730	805~637	20360~28497	7.5
11	12D	960	2013~1593	46267~64759	45
		730	1160~919	35182~49244	18.5
12	16B	900	3157~2497	102810~143910	132、160
		800	2489~1969	91392~127920	110
		710	1957~1549	81110~113520	75
		630	1538~1218	71971~100730	55
		560	1214~961	63974~89544	37
		500	967~766	57120~79950	30
		450	783~620	51408~71955	18.5
		400	618~490	45696~63960	15
		355	487~386	40555~56764	11
		315	383~303	35985~50368	7.5
13	20B	710	3069~2427	158410~221730	220
		630	2411~1908	140560~196750	160
		560	1902~1505	124950~174890	110
		500	1514~1199	111560~156150	75
		450	1225~970	100400~140530	55
		400	967~766	89250~124920	37
		355	761~603	79209~110860	30
		315	599~475	70284~98376	22
		280	473~375	62475~87445	15
		250	377~299	55781~78076	11
14	2.8C	2900	994~606	1131~2356	1.5
		2600	776~619	1174~1800	0.75
		2200	556~443	994~1522	0.37
		1800	372~296	813~1245	0.25



4-72 续表 4-72 Continued Form


序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m³/h	功率 Power kW
15	3.2C	2900	1300~792	1688~3517	2.2
		2600	1015~808	1753~2686	1.1
		2200	726~579	1483~2273	0.75
		1800	486~387	1213~1860	0.55
16	3.6C	2900	1578~989	2664~5268	3
		2600	1230~1009	2730~4058	2.2
		2200	881~723	2310~3434	1.5
		1800	590~483	1890~2810	0.75
17	4C	2900	2014~1320	4012~7419	5.5
		2600	1582~1172	4040~6207	3
		2300	1238~917	3573~5491	2.2
		2000	936~694	3107~4775	1.5
		1700	676~501	2641~4058	1.1
		1500	486~387	2131~3107	0.75
18	4.5C	2900	2554~1673	5712~10562	7.5
		2600	2007~1486	5762~8839	5.5
		2300	1570~1163	5088~7819	4
		2000	1187~879	4428~6799	3
		1700	858~635	3761~5779	2.2
		1500	635~486	3107~4775	1.5
19	5C	2900	3187~2019	7728~15445	15
		2600	2527~1876	7938~12845	11
		2300	1978~1468	7022~11363	7.5
		2000	1495~1110	6106~9881	5.5
		1700	1080~802	5190~8399	3
20	5.6C	2500	3209~2541	12734~17824	18.5
		2300	2511~1989	11265~15768	15
		2000	1900~1504	9795~13711	7.5
		1700	1372~1086	8326~11654	5.5
		1400	930~737	6857~9598	3
		1200	676~501	5190~8399	1.5
21	6C	2240	2734~1733	10314~20628	15
		2000	2176~1380	9209~18418	11
		1800	1760~1116	8288~16576	7.5
		1600	1389~881	7367~14734	5.5
		1250	846~537	5756~11511	3
		1120	679~431	5157~10314	2.2
		1000	541~344	4605~9209	2.2
		900	438~278	4144~8288	1.5
		800	346~220	3684~7367	1.1

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m³/h	功率 Power kW
22	6.3C	2200	2908~2303	15342~21474	18.5
		1900	2169~1718	13250~18548	11
		1600	1538~1218	11158~15618	7.5
		1300	1015~804	9066~12689	7.5
		1000	600~475	6973~9761	2.2
		700	294~233	4881~6833	0.75
23	7.1C	1800	2422~1801	15736~25265	18.5
		1600	1914~1423	13987~22635	15
		1450	1573~1168	12676~20513	11
		1200	1076~800	10490~16976	5.5
		960	689~512	8392~13581	3
		700	366~272	6119~9903	1.5
24	8C	1800	3143~2302	19646~36427	30、37
		1600	2478~1816	17463~32380	22、30
		1250	1507~1106	13643~25297	11
		1120	1209~887	12224~22666	7.5、11
		1000	963~707	10914~20237	5.5、7.5
		900	779~572	9823~18213	4、5.5
		800	615~452	8732~16190	3
		710	485~356	7749~14368	2.2、3
		630	381~280	6876~12749	2.2
25	12C	1120	2746~2172	53978~75552	75
		1000	2185~1729	48195~67457	45、55
		900	1767~1399	43375~60712	37
		800	1395~1104	38556~53966	22、30
		710	1097~869	34218~47895	18.5
		630	863~684	30362~42498	15
		560	682~540	26989~37776	7.5、11
		500	543~430	24097~33728	7.5
		450	440~348	21687~30356	4、5.5
		400	347~275	19278~26983	3

4-79型离心通风机

4-79 Centrifugal Fan

The fan can be used for indoor ventilation of general factories and large buildings. The conveying medium is air and other gases that are not self-igniting, non-flammable, non-winding, harmless to the human body, and non-corrosive. Other similar properties can also be used.

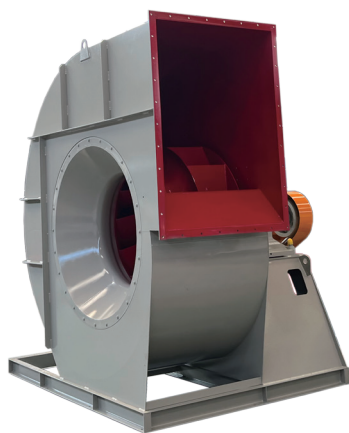

本风机可用于一般工厂及大型建筑物的室内通风换气，输送介质为空气及其它不自燃、不易爆、无缠绕性、对人体无害、无腐蚀性之气体，其它性能相近者亦可选用。

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m³/h	功率 Power kW
1	3A	2900	1196~726	1970~3830	1.5
		1450	304~177	990~1910	0.75
2	3.5A	2900	1628~981	3120~6070	3
		1450	412~245	1560~3040	1.1
3	4A	2900	2138~1275	4670~9080	5.5
		1450	530~324	2330~4540	1.1
4	4.5A	2900	2697~1618	6640~12920	11
		1450	677~402	3320~6450	1.5
5	5A	2900	3334~2001	9100~17720	15
		1450	834~500	4560~8860	2.2
6	6A	1450	1196~706	7890~15320	5.5
		960	530~314	5230~10100	1.5
7	7C	1800	2501~1481	15580~30200	22
		1600	1971~1167	13850~26850	15
		1250	1206~716	10820~20850	7.5
		1120	971~549	9650~18800	5.5
		1000	775~461	8650~16800	4
		900	628~373	7780~15100	3
		800	500~294	6920~13440	2.2
		710	392~235	6110~11900	1.5
8	8C	1600	2491~1481	21500~41700	30
		1270	1569~932	17100~33100	15
		1120	1226~726	15050~29200	11
		1000	971~579	13450~26050	7.5
		900	785~471	12100~23500	5.5
		800	618~353	10760~20850	4
		710	490~294	9520~18800	3
		630	387~226	8450~16450	2.2
9	10C	1300	2609~1775	38500~63500	55
		1170	2118~1442	34600~57100	37
		1000	1540~1049	29600~48800	22
		940	1363~932	27850~45900	18.5
		830	1059~726	24550~40500	15
		740	843~579	21900~36100	11
		660	667~461	19500~32200	7.5
		580	520~353	17160~28300	5.5
		520	412~284	15400~25400	4

4-2×79型离心通风机

本风机可用于一般工厂及大型建筑物、空调机组、高层建筑的室内通风换气，既可输入气体，也可输出气体，输送气体为空气和其它不自燃、对人体无害、无腐蚀性气体，气体内不允许有粘性物质，所含尘土及硬质颗粒物不大于150mg/m³，气体温度不超过80℃。

4-2×79 Centrifugal Fan

The fan can be used for indoor ventilation of general factories and large buildings, air-conditioning units and high-rise buildings. It can input both gas and gas. The gas is air and other non-self-igniting, harmless to human body, non-corrosive gas. No viscous substances are allowed in the gas. The dust and hard particles contained in the gas are not more than 150mg/m³, and the gas temperature is not more than 80℃.



序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m ³ /h	功率 Power kW
1	12E	1040	2393~1638	106600~175600	132
		940	1952~1334	96400~158600	90
		830	1530~1040	85000~140200	75
		740	1216~824	75800~124800	55
		680	1040~696	69700~114800	37
		580	755~510	59400~97800	22
		520	603~402	53300~87800	15
		470	490~333	48200~79400	11
		420	387~265	43000~70900	7.5
2	14E	850	2187~1491	138300~227000	160
		740	1657~1128	120200~197800	90
		660	1402~951	110600~181800	75
		580	1020~686	94200~155000	55
		520	814~549	84400~139000	30
		460	637~431	74600~123000	22
		420	530~363	68100~112400	18.5
		370	412~275	60000~98800	15
		330	324~226	53600~88200	11
3	16E	740	2177~1481	171400~295600	185
		660	1726~1177	160200~263800	132
		580	1334~902	140600~231800	90
		510	1030~696	123400~203800	75
		470	873~598	113800~188000	55
		420	696~481	101600~168000	37
		370	539~373	89600~148400	30
		330	431~294	80000~132200	18.5
		290	333~226	70200~116000	15
4	18E	660	2187~1491	228000~375800	250
		580	1687~1147	200400~330200	160
		520	1363~932	179800~296200	132
		470	1108~755	162400~267600	90
		420	883~598	145000~239000	75
		360	647~431	124200~205000	37
		330	549~363	113800~188000	30
		290	422~284	100800~165200	22
		260	343~226	89600~148200	15
5	20E	560	1942~1314	265600~438000	
		520	1677~1138	246800~406000	200
		470	1373~932	222000~367000	132
		420	1089~745	199200~327400	90
		370	843~579	175600~288200	75
		330	677~461	156600~257200	55
		290	520~353	137600~226000	37
		260	422~284	123400~202800	30

9-19 9-26系列 高压离心通风机

本高压离心通风机用于锻冶炉、玻璃、电镀、陶瓷、电池、无线电等行业高压强制通风，并可广泛用于粮食、饲料、矿粉等加工行业的物料输送，亦可用于纸箱机械设备、钢化玻璃设备等配套。输送介质为空气和其它不自燃、对人体无害、无腐蚀性气体，气体内不得有粘性物质，一般通风换气时使用温度不得超过80℃，所含尘土及硬质颗粒物 $\leq 150\text{mg}/\text{m}^3$ 。

9-19 9-26 Series High Pressure Centrifugal Fan

The high-pressure centrifugal fan is used for high-pressure forced ventilation in forging furnace, glass, electroplating, ceramics, battery, radio and other industries, and can be widely used for material transportation in food, feed, mineral powder and other processing industries, and can also be used for carton machinery and equipment. And tempered glass equipment and other supporting equipment.



9-19

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m^3/h	功率 Power kW
1	4A	2900	3665~3253	824~1704	2.2、3
2	4.5A	2900	4684~4112	1174~2504	4、5.5
3	5A	2900	5768~5080	1610~3488	7.5、11
4	5.6A	2900	7273~6400	2262~4901	11、18.5
5	6.3A	2900	9265~8148	3220~6978	18.5、30
6	7.1D	2980	11717~10426	4610~9988	37、55
7	8D	2900	15034~13362	6594~14287	75、110
		1450	3620~3231	3297~7144	7.5、15
8	9D	1450	4655~4101	4695~10171	15~22
9	10D	1450	5941~4958	6440~15455	30~37
10	11.2D	1450	7364~6246	9047~21713	45、75
		960	3182~2705	5990~14375	15、22
11	12.5D	1450	9229~7822	12577~30186	75、110
		960	3975~3377	8327~19985	22、37
12	14D	1450	11668~9878	17670~42409	132、220
		960	5004~4249	11699~28078	37、75
13	16D	1450	15425~13035	26377~63305	315、410
		960	6570~5575	17463~41912	75、110

9-26

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m^3/h	功率 Power kW
1	4A	2900	3852~3407	2198~3215	5.5
2	4.5A	2900	4910~4256	3130~4792	7.5、11
3	5A	2900	6035~5180	4293~6762	15、18.5
4	5.6A	2900	7610~6527	6032~9500	22、30
5	6.3A	2900	9698~8310	8588~13525	45~55
6	7.1D	2970	12421~12078	12292~14643	75
		2980	11776~10635	15862~19360	110
7	8D	2900	15955~13634	17584~27696	132、200
		1450	3834~3294	8792~13848	18.5、30
8	9D	1450	4869~4181	12518~19717	30~45
9	10D	1450	6143~5065	17172~30052	55~75
10	11.2D	1450	7747~6382	24126~42221	110、132
		960	3346~2763	15973~27953	30、37
11	12.5D	1450	9713~7993	33540~58695	160、250
		960	4179~3450	22206~38860	45、75
12	14D	1450	12285~10095	47121~82463	250、410
		960	5262~4341	31197~54596	75、110
13	16D	1450	16250~13324	70339~123090	500、850
		960	6911~5696	46569~81496	185、220

洗车风机

Car washing fan




洗车风机可根据客户需求定制全包围款和简易支架款，安装简便，样式美观；洗车风机风量大，运转平稳，旋向角度，风刀长短都可根据客户需求定制。

The car washing and drying fan can be customized with full coverage and simple bracket styles according to customer needs, which is easy to install and has a beautiful style; The car washing fan has a large air volume, smooth operation, and the rotation angle and length of the air blade can be customized according to customer needs.



9-12型高压离心通风机

9-12 High Pressure Centrifugal Fan



9-12型高压离心通风机是化铁炉和纸箱机械专用的高压离心风机，可输送无腐蚀性、不自燃、不含粘性物质气体，输送介质温度不超过80℃，所含尘土及硬质颗粒物不大于130mg/m³。

9-12 high-pressure centrifugal fan is a high-pressure centrifugal fan dedicated to iron furnace and carton machinery. It can transport non-corrosive, non-self-igniting and non-sticky materials. The temperature of the conveying medium does not exceed 80 °C, and the dust and hard materials are contained. The particulate matter is not more than 130 mg/m³.

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m ³ /h	功率 Power kW
6	8D	2950	16216~17096	2996~7133	30~55
7	9D	2970	20803~21931	4295~9039	45~90

XQ型斜槽高压离心通风机

XQ Type Chute High Pressure Centrifugal Fan



XQ I / II 是水泥行业专用风机，用于高压强制通风，并可广泛用于输送物料、输送空气，介质温度最高不超过80℃，介质所含尘土及硬质颗粒不大于150mg/m³。

XQ/II is a special fan for cement industry, which is used for high pressure forced ventilation. It can be widely used to transport materials and transport air. The temperature of the medium should not exceed 80 °C, and the dust and hard particles contained should be no more than 150mg/m³.

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m ³ /h	功率 Power kW
1	4.8A	2840	5466~4828	232/883	0.75~3
2	5.4A	2840	6918~6110	330/1257	1.5~5.5
3	4.7A	2840	5469~5187	585/1544	1.5~4

GY4-73型离心通引风机

GY4-73 Centrifugal Ventilation Fan

GY4-73 centrifugal ventilation fan is suitable for the ventilation system of 2~670t/h steam boiler in large thermal power plants. The conveying medium of the induced draft fan is flue gas, the temperature shall not exceed 250 °C, and the dust removal device with the dust removal efficiency not less than 85% must be installed before the induced draft fan. The medium delivered by the ventilator is air and the maximum temperature must not exceed 80 °C.



GY4-73型离心通引风机适用于大型火力发电厂中2~670t/h蒸汽锅炉的通引风系统。引风机输送介质为烟气，温度不得超过250℃，引风机前必须加装除尘效率不低于85%的除尘装置。通风机输送的介质为空气，最高温度不得超过80℃。

G4-73

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m³/h	功率 Power kW
1	8D	1450	2104~1400	16156~30993	18.5
2	9D	1450	2668~1775	23003~44128	30、37
		960	1163~775	15229~29216	11
3	10D	1450	3301~2194	31554~60533	55
		960	1437~958	20891~40077	15、18.5
		730	829~553	15886~30475	7.5
4	11D	1450	4003~2659	41999~80570	75、90
		960	1741~1160	27806~53343	22、30
		730	1004~669	21144~40562	11
5	12D	1450	4777~3171	54526~104600	132、160
		960	2075~1381	36100~69253	37、45
		730	1196~797	27451~52661	15、18.5
6	14D	1450	6541~4333	86586~166100	280、315
		960	2831~1883	57326~109970	75、90
		730	1630~1086	43591~83624	37、45
7	16D	960	3709~2465	85571~164150	185
		730	2133~1420	65069~124820	75
		580	1343~893	51699~99178	45
8	18D	960	4710~3126	121830~233730	280
		730	2705~1800	92648~177730	132
		580	1702~1133	73610~141210	75
9	20D	960	5837~3870	167130~320160	
		730	3347~2225	127080~243800	220、250
		580	2104~1400	100970~193700	110、132
10	22D	960	6865~4864	233000~434000	650~850
		730	3972~2815	177000~332000	310、370
		580	2501~1775	141000~263000	165、180
		480	1716~1216	116000~217000	140
11	25D	730	5139~3648	260000~484000	570~700
		580	3236~2295	206000~384000	280、350
		480	2216~1579	171000~318000	165、210
12	28D	730	6404~4541	365000~680000	1250
		580	4040~2864	289000~540000	630
		480	2775~1971	239000~446000	400
		375	1697~1206	187000~352000	320
13	29.5D	745	7218~5100	435000~810000	1250/630、1250
		596	4609~3236	348000~648000	800、1000

Y4-73 (t=200℃)



序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m³/h	功率 Power kW
1	8D	1450	1303~868	16156~30993	11~15
2	9D	1450	1651~1100	23003~44128	22、30
		960	721~481	15229~29219	7.5
3	10D	1450	2041~1359	31554~60533	37、45
		960	891~594	20891~40077	11
		730	515~343	15886~30475	5.5
4	11D	1450	2474~1646	41999~80570	55、75
		960	1079~719	27806~53343	18.5
		730	623~415	21144~40562	7.5、11
5	12D	1450	2949~1961	54526~104600	90、110
		960	1285~856	36100~69253	30
		730	742~495	27451~52661	11、15
6	14D	1450	4029~2676	86586~166100	185、220
		960	1752~1167	57326~109970	55、75
		730	1010~674	43591~83624	22、30
7	16D	960	2293~1526	85571~164150	110、132
		730	1321~880	65069~124820	45、55
		580	833~555	51699~99178	45
8	18D	960	2908~1934	121830~233730	200、220
		730	1674~1115	92648~177730	90、110
		580	1055~703	73610~141210	45、55
9	20D	960	3598~2392	167130~320160	380
		730	2070~1378	127080~243800	132、160
		580	1303~868	100970~193700	75、90
10	22D	960	4256~3021	233000~434000	430~600
		730	2471~1746	177000~332000	240、280
		580	1550~1098	141000~263000	125
		480	1069~755	116000~217000	140
11	25D	730	3187~2256	260000~484000	270、475
		580	2001~1422	206000~384000	230、280
		480	1383~981	171000~318000	140
12	28D	730	3972~2824	365000~680000	800、1000
		580	2511~1775	289000~540000	630
		480	1677~1187	239000~446000	400
13	29.5D	745	5423~3825	435000~810000	1250/630
		596	3472~2452	348000~649000	630

GY4-68型离心通引风机

GY4-68型离心通引风机主要适用于火力发电厂中蒸发量为230t/h以下蒸汽锅炉的通、引风系统。在性能相近而又无特殊要求时，G4-68亦可用于矿井通风及一般通风。本风机均具有高效率、低噪声、高强度等特点。

GY4-68 Centrifugal Blower Fan

GY4-68 centrifugal ventilation fan is mainly suitable for the ventilation and air intake system of steam boilers with a steam evaporation capacity below 230t/h in thermal power plants. G4-68 can also be used for mine ventilation when the performance is similar and there are no special requirements. And general ventilation. The fans are characterized by high efficiency, low noise and high strength.



G4-68

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m³/h	功率 Power kW
1	8D	1450	2177~1481	16985~30134	18.5
2	9D	1450	2756~1873	24183~42906	30
		960	1206~824	16011~28407	11
3	10D	1450	3403~2315	33173~58856	55
		960	1491~1010	21963~38966	15
		730	863~588	16701~29631	7.5
4	11.2D	1450	4276~2903	46606~82688	90
		960	1873~1275	30856~54745	30
		730	1079~736	23464~41629	11
5	12.5D	1450	5325~3619	64791~114952	160
		960	2334~1589	42896~76106	45
		730	1353~912	32619~57872	22
6	14D	1450	6679~4531	91027~161499	250、315
		960	2923~1991	60266~106924	75、90
		730	1697~1147	45827~81307	37
7	16D	960	3825~2599	89960~159606	160
		730	2207~1501	68407~121367	75
		580	1393~951	54351~96429	45

Y4-68 (t=140℃)

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m³/h	功率 Power kW
1	8D	1450	1540~1059	15889~29038	15
2	9D	1450	1952~1344	22623~41345	22、30
		960	853~588	14978~27374	7.5
3	10D	1450	2413~1657	31033~56715	45
		960	1059~726	20546~37549	15
		730	608~422	15623~28553	5.5
4	11.2D	1450	3021~2079	43599~79681	75
		960	1324~912	28866~52754	22
		730	765~530	21950~40115	11
5	12.5D	1450	3766~2589	60611~110772	110、132
		960	1648~1138	40129~73339	37
		730	951~657	30515~55768	18.5
6	14D	1450	4727~3246	85154~155627	250
		960	2069~1422	56378~103036	75
		730	1197~824	42871~78350	30
7	16D	960	2707~1854	84156~153803	110、132
		730	1559~1079	63994~116954	55
		580	991~677	50844~92922	45

GG、GY-15离心通引风机

该系列风机是0.5t/h~20t/h工业锅炉配套的专用通引风机。具有效率高、噪声低、性能曲线平坦、高效区宽广、维修方便等特点。

GG、GY-15 Centrifugal fan

This series of fans is a special ventilation fan for industrial boilers from 0.5t/h to 20t/h. It has the characteristics of high efficiency, low noise, flat performance curve, wide university area and convenient maintenance.



序号 Serial number	型号 Type	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m³/h	功率 Power kW
1	GG0.5-15	2900	1758~2156	1495~688	1.5
2	GG1-15	1450	1834~1579	2400~3500	4
3	GG2-15	2900	3138~2550	2600~4200	5.5
4	GG4-15	2900	3314~2844	7200~12000	11、15
5	GG6-15	1450	3099~2647	7000~12000	11、15
6	GG10-15	1450	2999~2734	14645~20795	22
7	GG15-15		3812~3655	21362~27964	37、45
8	GG20-15	1450	3138~2300	35000~62000	55
9	GG35-15	960	3812~2989	48000~86300	90、110


序号 Serial number	型号 Type	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m³/h	功率 Power kW
10	GY0.5-15	2500	3097~2842	2080~3065	5.5
11	GY1-15	2000	2942~2373	3800~6800	11
12	GY2-15	1450	3668~3020	5200~8500	11
13	GY4-15	1450	3805~3510	11500~16000	22、30
14	GY6-15	1450	4106~4057	15756~19312	37
15	GY10-15	1450	3714~3812	26321~36746	55、75
16	GY15-15	1450	2450~1960	37754~46543	55
17	GY20-15	1450	3695~2811	62888~92540	110
18	GY35-15	1450	3677~3432	74000~95000	132

GY6-41型离心通引风机

GY6-41型离心通引风机，是为适应燃用各种煤质并配有消烟除尘装置的工业锅炉而设计、最高全压效率高于80%的新系列低噪声风机，其他条件相当，性能相近者均可选用。

GY6-41 Centrifugal Fan

GY6-41 centrifugal ventilation fan is a new series of low noise fans designed to meet the needs of industrial boilers that use various coal qualities and equipped with smoke and dust removal devices. The highest full-pressure efficiency is higher than 80%. Can be used with similar performance.

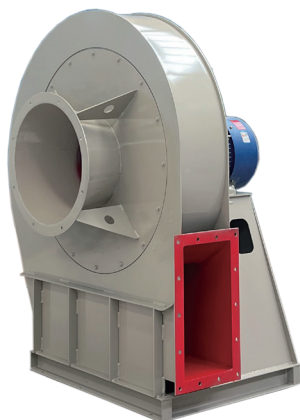

G6-41

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m³/h	功率 Power kW
1	2.5A	2800	451~1155	1043~403	0.55
2	3.3A	2825	954~1936	2301~1090	1.1
3	5.4A	1420	994~1254	4358~2130	3
4	6.4A	1440	1436~1811	7358~3596	5.5
5	7.1A	1440	1697~2270	10354~5349	7.5
6	8.5A	1470	2535~3391	18137~9369	18.5

Y6-41 (t=200℃)

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m³/h	功率 Power kW
7	3.55C	2950	588~1452	2962~841	1.5
8	4C	3450	1893~2676	3996~1355	3
9	4.5C	2925	1667~2327	4970~2317	4
		3250	2058~2873	5522~2574	5.5
10	5.4C	2600	2002~2604	7980~3900	7.5
		2900	2491~3240	8901~4350	11
11	7.1C	1915	1859~2487	13770~7113	11
		2100	2236~2991	15100~7800	15
		2200	2454~3283	15819~8171	18.5
12	9C	1750	2495~3338	25630~13239	30
		1640	2191~2981	24019~12407	22
		1965	3145~4208	28719~14866	37
13	10C	1600	2575~3444	32144~16604	37
14	11.2D	1480	2764~4086	41773~21578	45

GY7-41型离心通引风机

本风机主要特点是：风机效率高、全压高、噪声低、性能曲线平坦，经济使用区宽广，并采用后向板型叶片，风机在最佳工况点的全压内效率为86.5%噪声指标（比A声级）LS=11.5分贝，该两项指标与国内目前现有的各种工业锅炉通引风机相比均为最好水平。

GY7-41 Centrifugal Fan

The main features of the fan are: high fan efficiency, high total pressure, low noise, flat performance curve, wide economical use area, and the use of backward-type blades. The full-pressure efficiency of the fan at the optimum working point is 86.5% noise index (Compared with A sound level) LS = 11.5 decibels, these two indicators are the best level compared with the current domestic industrial boilers.



G7-41

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m³/h	功率 Power kW
1	4.5A	2900	4000~3222	3521~7042	7.5、11
2	5.6A	2900	6195~4990	6786~13537	22、30
3	7.1A	1460	2524~2033	6962~13925	11
4	8A	1470	3249~2617	10028~20056	15、18.5、22
5	9D	1470	4112~3312	14278~28556	30、37
6	12.5D	1480	8039~6473	38514~77029	160、185、200

Y7-41 (t=140℃)

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m³/h	功率 Power kW
1	4.5C	3000	2652~2136	3643~7285	7.5
		2900	2478~1996	3521~7042	5.5、7.5
		2570	1946~1567	3120~6241	4.0、5.5
		2340	1613~1299	2841~5682	3.0、4.0
2	5.6C	2750	3451~2779	6435~12866	15、18.5
		2500	2852~2297	5850~11670	11、15
		2200	2209~1779	5148~10296	7.5、11
		2000	1825~1470	4680~9360	5.5、7.5
3	7.1C	2400	4225~3402	11445~22890	37
		2350	4051~3262	11207~22413	30、37
		2130	3328~2680	10158~20315	22、30
		2000	2934~2363	9538~19075	18.5、22
4	9C	1930	4390~3536	18746~37493	55、75
		1800	3819~3075	17484~34967	45、55
		1700	3406~2743	16512~33025	37、45
		1570	2905~2340	15250~30499	30、37
5	10C	1700	4105~3386	22651~45301	75
		1620	3819~3075	21585~43170	55、75
		1510	3318~2672	20119~40238	45、55
		1420	2934~2363	18920~37840	37、45
6	8D	1460	1985~1599	9960~19920	15
7	9D	1470	2547~2051	14278~28557	22、30
8	10D	1480	3187~2567	19719~39439	37、45
9	11D	1480	3856~3106	24409~48819	55、75
10	11.2D	1480	4215~3395	26678~53358	75、90
11	12.5D	1480	4980~4010	38514~77029	110、132、160

Y6-30型离心引风机

本风机配套锅炉使用，具有高效率、低噪声特点，也可以用于介质温度不超过250℃、无腐蚀性及粘性物质的送排风系统。

Y6-30 Centrifugal Induced Draft Fan

The fan is used in boilers with high efficiency and low noise. It can also be used in air supply and exhaust systems with medium temperature not exceeding 250℃, non-corrosive and viscous materials.

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m³/h	功率 Power kW
1	3.5C	2350	853~727	655~1192	0.75
2	6.5C	2150	2206~2020	4263~4945	5.5
3	7.5C	1900	2598~2500	5216~6600	7.5
		1900	2392~2196	7349~8771	11
4	8.6C	1850	3226~3040	9494~14000	18.5

Y5-47型离心引风机

Y5-47型离心引风机是为燃用各种煤质并配有消烟除尘装置的0.2~20t/h工业锅炉或生活锅炉配套设计的,有C式及D式传动。输送气体含尘量应不大于150mg/m³,超过250℃可提供不锈钢高温锅炉引风机。



Y5-47 Centrifugal Induced Draft Fan

Y5-47 centrifugal induced draft fan is designed for 0.2~20t/h industrial boiler or domestic boiler with various coal quality and equipped with smoke elimination and dust removal device. It has C type and D type transmission. The dust content of the conveying gas should be no more than 150mg/m³, and the stainless steel high-temperature boiler induced draft fan can be provided above 250°C. (t=200°C)

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m ³ /h	功率 Power kW
1	4C	3300	1922~1393	2751~5190	4
		2900	1481~1079	2417~4561	3
2	5C	2900	2324~1687	4723~8909	7.5
		2620	1893~1373	4267~8048	5.5
3	6C	2850	3364~2452	8020~15129	18.5
		2620	2844~2069	7372~13908	15
4	8C	2020	3001~2187	13474~25417	30
		1860	2550~1853	12407~23404	22
5	9C	1900	3364~2452	18045~34039	45
		1800	3020~2197	17095~32247	37
6	12D	1480	3628~2638	33318~62850	75~90
7	12.4D	1480	3874~2824	36762~69347	110

Y5-48型离心引风机

Y5-48 Centrifugal Induced Draft Fan

Y5-48 centrifugal induced draft fan is designed for 1~20t/h industrial boiler or domestic boiler equipped with smoke elimination and dust removal device. It is suitable for supporting equipment of mine and large industrial boiler. The temperature of the conveying gas shall not exceed 250 °C. A dust removal device with an efficiency of not less than 85% must be installed before the induced draft fan. A stainless steel high temperature boiler induced draft fan can be provided above 250 °C.



Y5-48型离心引风机为配有消烟除尘装置的1~20t/h工业锅炉或生活锅炉配套设计的,适用厂矿、大型工业锅炉配套设备。输送气体温度不得超过250℃,在引风机前必须加装效率不低于85%的除尘装置,超过250℃的可提供不锈钢高温引风机。

№ 4 ~ 6.3C (t=200°C) № 8 ~ 12.5C (t=140°C)

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m ³ /h	功率 Power kW
1	4C	3550	2221~1501	2932~5564	5.5
		3150	1746~1180	2602~4937	4
		2800	1377~932	2313~4388	3
		2500	1097~742	2065~3918	2.2
2	5C	3150	2819~1913	5304~9851	11
		2800	2223~1509	4715~8757	7.5
		2500	1769~1202	4210~7818	5.5
		2240	1419~964	3772~7005	4
3	6.3C	2800	3545~2403	9432~17516	22
		2500	2819~1913	8421~15639	15
		2240	2259~1533	7546~14013	11
		2000	1798~1221	6737~12511	7.5
4	8C	2000	3323~2253	13794~25619	30
		1800	2686~1823	12415~23057	22
		1600	2118~1438	11035~20495	15
		1400	1619~1100	9656~17933	11
5	10C	1800	4483~2958	22250~44634	75
		1600	3531~2332	19778~39674	55
		1400	2696~1782	17305~34715	37
		1250	2145~1419	15451~30995	22
6	12.5C	1400	4234~2794	33800~67803	110
		1250	3365~2223	30179~60538	75
		1120	2696~1782	27040~54242	55
		1000	2145~1419	24143~48431	37

GY5-51型离心送引风机

本风机适用于火力发电厂2~670t/h蒸汽锅炉的送引风机系统，亦可满足流化床炉高压头性能参数之需求，该项系列风机也可用于除尘、矿井通风及一般通风系统。

GY5-51 Centrifugal Fan

The fan is suitable for the air intake system of a 2~670t/h steam boiler in a thermal power plant. The series of fans can also be used for dust removal, mine ventilation and general ventilation systems.



G5-51

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m³/h	功率 Power kW
1	8D	1450	2525~1771	9900~23100	15、18.5
2	9D	1450	3195~2241	14100~33000	30、37
3	10D	1450	3944~2767	19300~45100	45、55
4	11D	1450	4772~3348	25700~60000	75、90
		960	2092~1468	17000~39700	22、30
5	12D	1450	5679~3984	33400~77900	110、132
		960	2490~1746	22100~51600	37、45
6	13D	1450	6665~4676	42400~99000	160~200
		960	2922~2050	28100~65600	45、55
7	14D	1450	7729~5423	53000~124000	220~280
		960	3388~2377	35100~102100	75、90
8	15D	1450	8873~6226	65100~152000	315~400
		960	3890~2729	43100~101000	90~132
		730	2250~1578	32800~76800	45、55
9	16D	1450	10095~7083	79100~185000	450、560
		960	4426~3105	52400~122000	132、160
		730	2560~1795	39800~93000	55、75
10	17D	960	4996~3505	62900~147000	160~220
		730	2889~2027	47800~112000	75~110
11	18D	960	5601~3929	74600~174000	220~315
		730	3239~2272	56700~132000	110、132
12	19D	960	6241~4378	87700~205000	280~400
		730	3609~2532	66700~156000	132~185
13	20D	960	6915~4851	102000~239000	400、500
		730	3999~2805	77800~182000	160~220
14	21D	960	7622~5348	118000~276000	500~630
		730	4408~3093	90100~210000	220~280
		580	2783~1952	71600~167000	160
15	22D	960	8366~5870	136000~318000	630~800
		730	4838~3394	104000~242000	280~355
		580	3055~3143	82300~192000	160、185
16	23.5D	960	9545~6698	166000~387000	800~1120
		730	5519~3873	126000~295000	355~500
		580	3486~2445	100000~234000	220、250
17	25D	730	6248~4383	152000~355000	500~710
		580	3944~2767	121000~282000	250~355
18	26.5D	730	7020~4925	181000~422000	630~900
		580	4432~3109	144000~336000	355、450
		480	3036~2129	119000~278000	220、250
19	28D	730	7837~5498	213000~498000	1000~1250
		580	4948~3471	169000~396000	450~630
		480	3389~2377	140000~328000	315~355
20	29.5D	730	8699~6104	250000~583000	1120~1600
		580	5491~3853	199000~463000	560~800
		480	3762~2639	164000~383000	355~500

Y5-51 (t=200℃)



序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m³/h	功率 Power kW
1	8D	1450	1568~1098	9900~23100	11、15
2	9D	1450	1984~1391	14100~32900	18.5~30
3	10D	1450	2449~1718	19300~45100	30、37
4	11D	1450	2963~2079	25700~60000	55、75
		960	1299~911	17000~39700	15、18.5
5	12D	1450	3525~2474	33400~77900	75~110
		960	1546~1083	22100~51600	22、30
6	13D	1450	4138~2903	42400~99000	110~160
		960	1814~1274	28100~65600	30~45
7	14D	1450	4799~3367	53000~124000	160~200
		960	2104~1476	35100~82100	45~75
8	15D	1450	5509~3865	65100~152000	220~315
		960	2415~1694	43100~101000	75、90
		730	1397~980	32800~76800	30、37
9	16D	1450	6268~4397	79100~185000	315、400
		960	2748~1926	52400~122000	90~132
		730	1589~1114	39800~93000	45、55
10	17D	960	3102~2176	62900~147000	132、160
		730	1794~1258	47800~112000	55、75
11	18D	960	3478~2439	74600~174000	160~220
		730	2012~1411	56700~132000	75、90
12	19D	960	3875~2718	88700~205000	200~280
		730	2241~1573	66700~156000	90~132
13	20D	960	4294~3170	102000~239000	280~355
		730	2483~1741	77800~182000	132、160
14	21D	960	4733~3320	118000~276000	355~450
		730	2737~1920	90100~210000	160~200
		580	1728~1212	71600~167000	90、110
15	22D	960	5194~3644	136000~318000	450~560
		730	3004~2107	104000~242000	200~250
		580	1897~1330	82300~192000	110、132
16	23.5D	960	5928~4157	166000~387000	560~800
		730	3428~2404	126000~295000	280~355
		580	2164~1518	100000~234000	185
17	25D	730	3879~2721	152000~355000	355~500
		580	2449~1718	121000~282000	220、250
18	26.5D	730	4358~3057	181000~422000	500~630
		580	2751~1930	144000~336000	280、315
		480	1884~1322	119000~278000	220
19	28D	730	4865~3413	213000~498000	630、800
		580	3072~2155	169000~396000	315、400
		480	2104~1470	140000~328000	250
20	29.5D	730	5401~3789	250000~583000	800~1120
		580	3410~2392	199000~463000	400~560
		480	2336~1638	164000~383000	315

GY6-51型离心送引风机

GY6-51型离心送引风机主要用于火力发电厂中2~670t/h蒸汽锅炉的引风系统，亦满足了流化床炉高压头性能参数之需求，该系列风机也可用于除尘、矿井通风及一般通风系统。

GY6-51 Centrifugal Fan


GY6-51 centrifugal blower fan is mainly used for the air intake system of 2~670t/h steam boiler in thermal power plant, and also meets the requirements of fluidized bed performance parameters. This series of fans can also be used for dust removal, mine ventilation and general ventilation system.



G6-51

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m³/h	功率 Power kW
1	8D	1450	2745~1859	11000~26400	15~22
2	9D	1450	3474~2353	15700~37500	30、45
3	10D	1450	4289~2905	21500~51500	45~75
4	11D	1450	5190~3515	28600~68500	75~110
		960	2275~1541	18900~45400	22、30
5	12D	1450	6176~4183	37100~89000	110~160
		960	2707~1834	24600~59000	37~55
6	13D	1450	7248~4909	47200~113000	185~250
		960	3177~2152	31200~74900	55、75
7	14D	1450	8406~5694	58900~141000	250~355
		960	3685~2496	39000~93400	75~110
8	15D	1450	9650~6537	72400~172000	355~500
		960	4230~2865	48100~115000	110~160
		730	2446~1657	36600~87400	45~75
9	16D	1450	10980~7437	88100~211000	500~710
		960	4813~3260	58300~140000	160~200
		730	2783~1885	44300~106000	75、90
10	17D	960	5433~3680	69900~168000	200~280
		730	3142~2128	53200~128000	90~132
11	18D	960	6091~4126	83000~199000	250~355
		730	3522~2386	63100~151000	110~160
12	19D	960	6787~4597	97600~234000	315~500
		730	3924~2658	74200~178000	160~200
13	20D	960	7520~5094	114000~273000	450~630
		730	4348~2946	86700~208000	185~280
14	21D	960	8290~5616	132000~316000	560~800
		730	4794~3247	100000~240000	280、355
		580	3026~2050	79500~191000	220
15	22D	960	9099~6164	152000~363000	710~1000
		730	5261~3564	116000~276000	315~450
		580	3321~2250	92200~219000	220
16	23.5D	960	10380~7033	185000~443000	1000~1400
		730	6003~4066	140000~336000	400~630
		580	3789~2567	112000~267000	220~315
17	25D	730	6794~4603	169000~406000	630~800
		580	4289~2905	134000~323000	280~400
18	26.5D	730	7633~5172	201000~483000	800~1120
		580	4818~3265	160000~385000	400~560
		480	3300~2236	132000~319000	220~315
19	28D	730	8522~5774	237000~569000	1000~1400
		580	5280~3645	189000~454000	560~710
		480	3685~2496	156000~376000	315、400
20	29.5D	730	9460~6410	278000~667000	1250~2000
		580	5972~4046	221000~530000	710~1000
		480	4090~2771	185000~439000	400~560

Y6-51 (t=200℃)

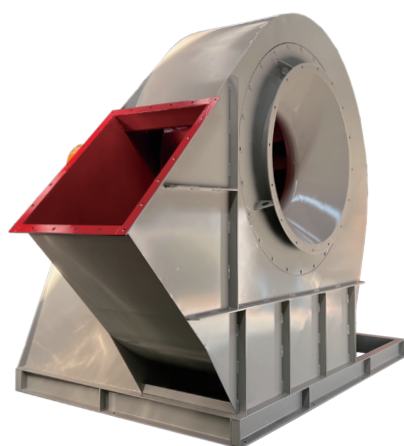

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m³/h	功率 Power kW
1	8D	1450	1704~1154	11000~26400	11、15
2	9D	1450	2157~1461	15700~37500	22、30
3	10D	1450	2663~1803	21500~51500	37、45
4	11D	1450	3222~2182	28600~68500	55、75
		960	1412~955	18900~45400	15~22
5	12D	1450	3835~2597	37200~89000	90、110
		960	1681~1136	24600~58900	30、37
6	13D	1450	4500~3048	47200~113000	132~185
		960	1973~1334	31200~74800	37~55
7	14D	1450	5219~3535	59000~141000	220、250
		960	2288~1550	39100~93400	55、75
8	15D	1450	5992~4058	72600~174000	250~355
		960	2627~1779	48100~115000	75~110
		730	1519~1027	36600~87400	37、45
9	16D	1450	6817~4617	88100~211000	355~500
		960	2988~2024	58300~140000	110~160
		730	1728~1169	44300~106000	45~75
10	17D	960	3384~2285	69900~168000	132~200
		730	1957~1320	53200~128000	75、90
11	18D	960	3794~2562	83000~199000	200、250
		730	2194~1479	63100~151000	90、110
12	19D	960	4227~2855	97600~234000	250~355
		730	2444~1651	74200~178000	110~160
13	20D	960	4684~3163	114000~273000	315~450
		730	2708~1826	86700~208000	132~185
14	21D	960	5164~3487	132000~316000	400~560
		730	2986~2016	100000~240000	185~250
		580	1885~1273	79500~191000	90、110
15	22D	960	5668~3827	152000~363000	560~710
		730	3277~2235	116000~276000	220~315
		580	2069~1394	92200~219000	110~160
16	23.5D	960	6467~4367	185000~443000	710~1000
		730	3739~2525	141000~337000	315~450
		580	2361~1594	112000~268000	220
17	25D	730	4232~2858	169000~406000	400~560
		580	2672~1804	134000~323000	220~280
18	26.5D	730	4755~3211	202000~481000	560~800
		580	3002~2027	160000~385000	280~400
		480	2056~1388	132000~319000	220
19	28D	730	5309~3585	238000~571000	710~1000
		580	3351~2263	189000~453000	355~500
		480	2295~1550	156000~375000	220~280
20	29.5D	730	5893~3979	278000~667000	960~1400
		580	3720~2512	221000~530000	500~710
		480	2548~1720	183000~439000	315~400

Y8-39型离心引风机

本系列风机适用于配有消烟除尘装置的0.5~35t/h工业锅炉。具有效率高、噪声低、性能曲线平坦高效区宽广等特点。输送气体最高温度不得超过250℃，超过250℃可提供不锈钢材质的高温引风机。

Y8-39 Centrifugal Induced Draft Fan

This series of fans is suitable for 0.5~35t/h industrial boilers or domestic boilers equipped with smoke and dust removal devices. It has the characteristics of high efficiency, low noise, flat and high performance curve and wide area. The maximum temperature of the conveying gas must not exceed 250℃. More than 250℃ can provide stainless steel high temperature induced draft fan.



Y9-38型离心引风机

Y9-38 Centrifugal Induced Draft Fan



№ 4 ~ 6.3D (t=220℃) № 7.1D 以上 (t=200℃)

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m³/h	功率 Power kW
1	4D	2900	2049~1882	3242~5660	4、5.5
2	4.5D	2900	2589~2392	4613~8059	7.5、11
3	5D	2900	3197~2951	6332~11055	11~18.5
4	5.6D	2900	4011~3707	8896~15531	18.5~30
5	6.3D	1450	1265~1167	6333~11057	5.5、7.5
		2900	5080~4687	12667~22114	37、55
6	7.1D	1450	1686~1333	9066~19207	11、15
7	8D	1450	2147~1696	12969~27477	18.5~30
8	9D	1450	2716~2147	18465~39122	30~45
9	10D	1450	3412~2922	25330~53666	55~90
10	11.2D	1450	4295~3667	35587~75397	90~160
		960	1882~1608	23561~49918	30~45
11	12.5D	1450	5344~4570	49473~104816	132~250
		960	2343~2000	32754~69395	45~75
		730	1353~1157	24907~52769	22、30
12	14D	960	2942~2510	46018~97496	75~132
		730	1706~1451	34993~74137	37~55
13	16D	960	3844~3285	68692~145533	160~250
		730	2216~1892	52234~110666	55~110

№ 4 ~ 6.3D (t=200℃) № 7.1D 以上 (t=175℃)

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m³/h	功率 Power kW
1	4D	2900	2334~2226	3297~5495	5.5、7.5
2	4.5D	2900	2961~2814	4694~7824	11
3	5D	2900	3658~3481	6439~10733	15、18.5
4	5.6D	2900	4579~4364	9047~15079	30、37
5	6.3D	1450	1451~1372	6441~10735	5.5、7.5
		2900	5805~5521	12882~21470	45~75
6	7.1D	1450	1873~1735	9219~18439	11~18.5
7	8D	1450	2373~2206	13189~26378	22、30
8	9D	1450	3010~2785	18778~37557	37、55
9	10D	1450	3716~3442	25760~51519	55~90
10	11.2D	1450	4658~4324	36190~72381	110~160
		960	2030~1892	23960~47921	30、45
11	12.5D	1450	5805~5384	50312~100624	160~315
		960	2540~2353	33310~66620	55~90
		730	1471~1363	25330~50659	22~37
12	14D	960	3187~2961	46789~93596	75~160
		730	1843~1716	35586~71172	37~75
13	16D	960	4167~3863	69856~139712	160~280
		730	2402~2235	53119~106239	75~132

MQS5-54型物料输送风机

MQS5-54 Material Conveying Fan

MQS5-54 type scattered material conveying fan is mainly used in wood processing enterprises such as: wood-based panel factory, wood factory, furniture factory and other similar units. It can use wind power to disperse wood or bamboo from the ground. Send to B.



MQS5-54 型散碎物料输送风机主要用于木材加工企业如：人造板厂、制材厂、家具厂及其它性质类似单位，它可以凭借风力，把木质或竹质等散碎物料从甲地送至乙地。

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m³/h	功率 Power kW
1	5C	2800	3875~2715	3109~14508	11~18.5
		2650	3469~2443	2942~13731	7.5~15
		2500	3090~2168	2776~12954	7.5~15
		2370	2776~1952	2631~12280	5.5~11
2	6C	2650	4993~3512	5085~23727	18.5、37
		2500	4444~3129	4797~22384	18.5、30
		2380	4032~2835	4567~21310	15~30
		2240	3571~2511	4298~20056	11~22
		2116	3188~2237	4060~18946	11~18.5
3	8C	2000	5052~3551	9096~42447	30~75
		1880	4464~3139	8550~39900	30~55
		1780	4002~2815	8095~37778	30、45
		1680	3571~2502	7646~35655	18.5~45
		1500	2845~2001	6822~31835	18.5、30
		1410	2511~1766	6413~29925	11~22
4	10C	1570	4666~4031	18634~48515	45~75
		1470	4060~3174	17390~54980	37~75
		1400	3675~3059	16570~48475	37~75
		1250	2924~2309	15000~40840	22~45
		1150	2492~1934	13655~43120	18.5~37

SF系列轴流通风机

SF Series Axial Flow Fan

The fan has low noise, large air volume, low power consumption and reasonable structure. Widely used in industrial and mining enterprises, workshops and other places, can provide fixed, post-level adjustable position machine and mobile adjustable position machine.



本风机噪声低、风量大、耗电少、结构合理。广泛用于工矿企业、车间仓库等场所，可提供固定式、岗位式级可调岗位式机和移动可调式岗位机。

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m³/h	功率 Power kW
1	SFG2~2	2800	140	1300	0.12
2	SFG2~2R	2800	140	1300	0.12
3	SFG2~4	1450	20	600	0.06
4	SFG2~4R	1450	20	600	0.06
5	SFG2.5~2	2800	215	2100	0.25
6	SFG2.5~2R	2800	215	2100	0.25
7	SFG2.5~4	1450	35	1000	0.09
8	SFG2.5~4R	1450	35	1000	0.09
9	SFG3~2	2800	230	3000	0.37
10	SFG3~2R	2800	230	3000	0.37
11	SFG3~4	1450	59	2000	0.12
12	SFG3~4R	1450	59	2000	0.12
13	SFG3.5~2	2800	260	6000	0.75
14	SFG3.5~4	1450	78	3000	0.25
15	SFG4~2	2900	380	10000	1.1
16	SFG4~2R	2900	380	10000	1.1
17	SFG4~4	1450	80	5870	0.55
18	SFG4~4R	1450	80	5870	0.55
19	SFG5~4	1450	170	10000	0.75
20	SFG5~4R	1450	170	10000	0.75
21	SFG5~6	960	120	7700	0.37
22	SFG6~4	1450	300	18700	2.2
23	SFG6~6	960	180	14500	1.1
24	SFG7~4	1450	350	24500	3
25	SFG7~6	960	210	22000	2.2
26	SFG8~4	1450	380	37200	4
27	SFG8~6	960	230	28000	3
28	SFG10~6	960	260	50000	4

T35型轴流通风机

T35 Axial Flow Fan

This fan is an alternative to the 30K4 axial flow fan. The T35 can be used as a ventilation or reinforced heating for general factory, warehouse, office, residential, etc., and can be installed in series in a long exhaust pipe. In order to improve the wind pressure in the pipeline, the conveying medium is non-flammable, non-explosive, non-corrosive and significant dust gas, and the medium temperature is $\leq 80^{\circ}\text{C}$.



本风机是30K4型轴流通风机的替代型产品, T35可作为一般工厂、仓库、办公室、住宅内通风换气或加强暖气散热之用, 亦可在较长的排气管道内间隔串联安装, 以提高管道内风压, 输送介质为不易燃、不易爆、无腐蚀及显著粉尘气体, 介质温度 $\leq 80^{\circ}\text{C}$ 。

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m³/h	功率 Power kW
1	2.8A	2900	128~186	1224~2778	0.12~0.370
		1450	32~46.6	613~1392	0.025、0.040
2	3.15A	2900	170.1~247.0	1944~4155	0.180~0.550
		1450	42.5~61.7	972~2078	0.025~0.090
3	3.55A	2900	216.1~313.6	2783~5951	0.370~1.1
		1450	54~78.4	1394~2981	0.040~0.120
4	4A	2900	274.3~398.2	3980~8500	0.75~2.2
		1450	68.6~99.5	1993~4261	0.090~0.250
5	4.5A	1450	86.8~126	2838~6067	0.12~0.370
6	5A	140	112.6~164.6	4289~8712	0.250~0.750
		960	49.1~71.8	2839~5768	0.370
7	5.6A	1450	140.9~206	6025~12239	0.370~1.1
		960	61.8~90.3	3989~8103	0.370
8	6.3A	1450	178.3~260.7	8579~17426	0.750~2.2
		960	78.2~114.3	5680~11534	0.370、0.750
9	7.1A	1450	226.5~331.1	12280~24944	1.5~4
		960	99.3~145.2	8130~16514	0.75、1.1
10	8A	1450	287.6~420.3	17567~35682	3~7.5
		960	126.1~184.2	11630~23624	0.75~2.2
11	9A	960	159.5~233.2	16560~33937	1.5~4
12	10A	960	197~287.9	22716~46141	2.2~7.5
13	11.2A	960	247~361.1	31914~64825	4~11

GD30K2型轴流通风机

GD30K2 Axial Flow Fan

The fan is pneumatically transported granular or powdery material, generally suitable for pneumatic conveying inside the factory, and is widely applicable to general forging and high pressure forced ventilation. The type of transport gas can be air and other non-self-igniting non-self-igniting, non-viscous materials that are non-corrosive to the human body. For example, stainless steel fans can be ordered in the chemical industry that transport corrosive gases to steel.



本风机是用气力输送粒状或粉状物料, 一般用于工厂内的气力输送, 并广泛用于一般锻冶、高压强制通风。输送气体种类可以是空气和其它对人无害对钢材无腐蚀的不自燃、不含粘性物质气体, 如输送对钢材有腐蚀性气体的化工行业可订制不锈钢风机。

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m³/h	功率 Power kW
叶片数 (Number of Blades) 4					
1	6C	1450	167~185	7250~13150	1.1、2.2
		960	74~82	4800~8700	0.75
2	7C	1450	226~245	11500~20900	2.2、4
		960	93~103	7550~13900	1.1
3	8C	1450	294~324	17300~31300	5.5、7.5
		960	127~145	11400~20600	1.5、2.2
4	9C	960	157~183	12600~29300	2.2、4
5	10C	960	206~235	22600~41000	4、7.5
叶片数 (Number of Blades) 6					
6	6C	1450	186~235	7800~14000	1.1、2.2
		960	83~104	5170~9270	0.75
7	7C	1450	255~321	12500~22500	2.2、4
		960	113~140	8270~14900	1.1
8	8C	1450	333~419	18000~33200	5.5、7.5
		960	147~181	12000~22000	1.5、2.2
9	9C	960	186~235	17500~32000	2.2、4
10	10C	960	226~284	24000~43000	4、7.5

LNZ- I 型砖瓦窑专用 轴流风机

本风机为最新研制的产品，适用于输送高温、高湿气体，是砖瓦生产企业送热风、排潮的理想设备，深得用户的好评。



LNZ- I Type Axial Flow Fan for Brick Kiln

This fan is the newly developed product, which is suitable for conveying high temperature and high temperature gas. It is an ideal equipment for brick and tile manufacturers to send hot air and moisture. It has won high praise from users.

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m³/h	功率 Power kW
1	8	960	210	24000	2.2
2	10	960	298	46000	5.5
3	12	1450	500~800	70000~100000	15
4	14	840	500~700	80000~110000	18.5
5	16	680	500~700	100000~140000	22
		720	550~800	110000~150000	30
6	18	760	500~700	110000~160000	30
		840	550~800	130000~170000	37
7	20	610	550~730	140000~180000	37
		630	650~820	160000~190000	45

LNZ- II 型砖瓦窑专用 离心风机


本风机是根据客户反馈意见进行改进设计的，结构紧凑，安装调试方便，适用于输送高温、高湿气体，是砖瓦生产企业干燥砖坯的理想送风设备。



LNZ- II Type Centrifugal Fan for Brick Kiln


The fan is designed and improved according to customer feedback. It is compact in structure, convenient in installation and debugging, and suitable for conveying high temperature and high humidity gas. It is an ideal air supply device for drying bricks of brick and tile manufacturers.

序号 Serial number	机号 Machine number №	转速 Rotating Speed r/min	全压 Full Pressure Pa	流量 Air Volume m³/h	功率 Power kW
1	8C	1800	3101	22511	30
		1600	2445	20010	22
		1450	1487	18244	15
		1250	1454	17527	11
2	10C	1250	2247	41044	37
		1120	1801	36775	30
		1000	1514	27890	22
3	12C	1000	2070	56739	45
		900	1674	51065	37
		800	1187	51162	30
4	14C	780	1095	67980	37
		730	1010	55156	30
5	16C	760	1853	95490	75
		720	1303	90464	55
		600	1116	83480	45
6	18C	730	1667	181000	90
		670	1380	140000	75
		620	1186	131690	55
7	20C	730	1714	174890	110~132
		620	1505	153890	90
		580	1288	140840	75
8	22C	560	1710	228000	132
		500	1491	217000	110
		460	1382	216600	90

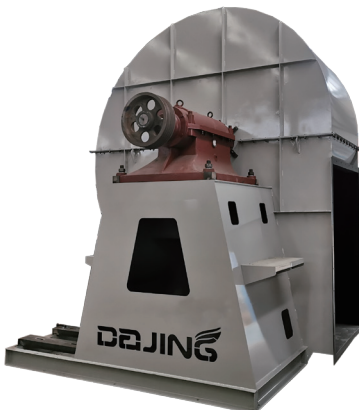

Partial Engineering Case1

部分工程案例
1

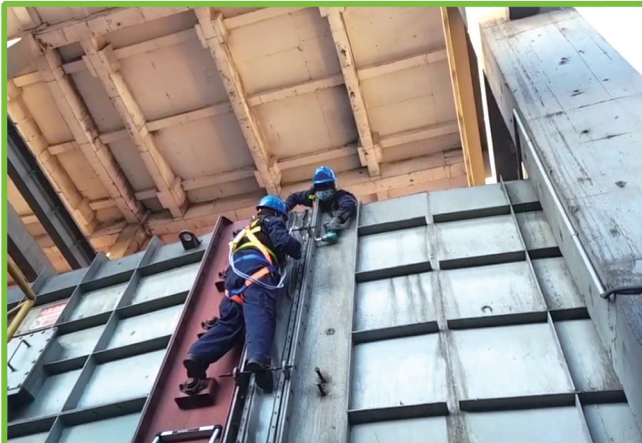

Partial Engineering Case2

部分工程案例
2




Partial Engineering Case3


部分工程案例
3




风机出风口角度示意图
Angle view of blower outlet




左 (L) 0°




右 (R) 0°




左 (L) 45°




右 (R) 45°




左 (L) 90°




右 (R) 90°




左 (L) 135°



右 (R) 135°




左 (L) 180°




右 (R) 180°




左 (L) 225°



右 (R) 225°



左 (L) 270°



右 (R) 270°


左旋：从电机端或传动组端
正视逆时针方向旋转

Left-hand rotation:
Rotate counterclockwise from the
motor end or the drive unit end.

右旋：从电机端或传动组端
正视顺时针方向旋转


Right-handed:
Rotate clockwise from the motor
end or the drive end.

风机传动方式示意图
Blower transmission mode diagram




A式传动：
风机无附加轴承支承
叶轮与电机直联传动

Type A Drive
Fan without additional bearing support
Impeller and motor direct drive




B式传动：
风机叶轮悬臂支承
带轮在两轴承之间的V型带传动

Type B Drive
Fan impeller cantilever support
V-belt drive with pulley between
the two bearings




C式传动：
风机叶轮悬臂支承
带轮在两轴承之外的V型带传动

Type C Drive
Fan impeller cantilever support
V-belt drive with pulleys outside
the two bearings




D式传动：
风机叶轮悬臂支承
联轴器传动

Type D Drive
Fan impeller cantilever support
Coupling drive



E式传动：
风机叶轮双点支承
带轮在两轴承之外的V型带传动

Type E Drive
Fan impeller double point support
V-belt drive with pulleys outside
the two bearings



F式传动：
风机叶轮双点支承
联轴器传动 带进气箱

Type F Drive
Fan impeller double point support
Coupling drive and with air box